




Product Specification

For Optical Fiber Cable GYXTW

1. Optical Fiber Cable Features

1.1 Structure:

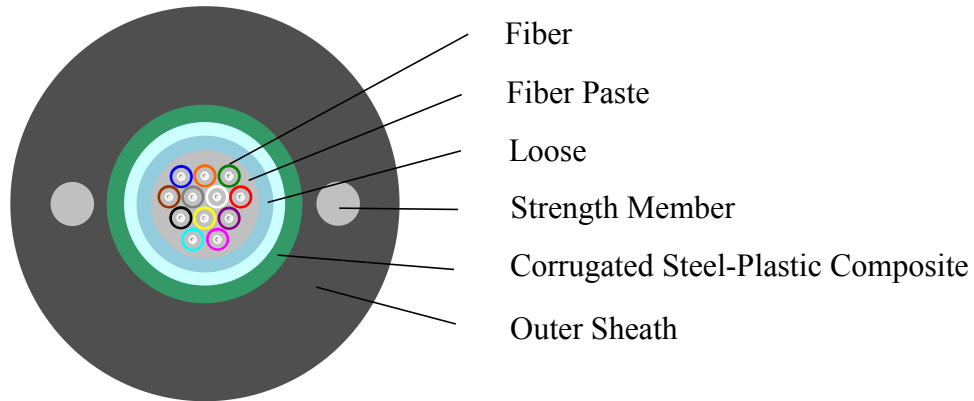

Applications:

Mainly adopted to the laying method of aerial, duct, and cable trench.

1.2 Cable parameters

Items		Specifications
Fiber Count		8/12/24
Fiber Type		G.652D
Colored Coating Fiber	Dimension	250 μ m \pm 15 μ m
	Color	Blue、 Orange、 Green、 Brown、 Gray、 White 、 Red、 Black、 Yellow、 Purple、 Pink、 Aqua With Color Point :Blue、 Orange、 Green、 Brown、 Grey、 Write、 Red、 Natural、 Yellow、 Purple、 Pink、 Aqua
Loose Tube	Dimension	2.0mm \pm 0.1mm (8F/12F)
		3.0mm \pm 0.1mm (24F)
	Material	PBT
	Color	Natural
Strength Member	Diameter	1.0mm*2
	Material	Phosphating Steel Wire
Outer Jacket	Dimension	7.8mm \pm 0.3mm (6F/8F/12F)
		9.0mm \pm 0.3mm (24F)
	Material	PE
	Color	Black



浙江万马天屹通信线缆有限公司

Zhejiang Wanma Tianyi Communication Wire & Cable Co., Ltd.

Fiber Attenuation coefficient in Cable	dB/km(1310nm)	≤0.36dB/km
	dB/km(1550nm)	≤0.22dB/km

Color-coding of the fiber will be clear, and not fade under the influence of the temperature of working and installation environment.

1.3 Mechanical and physical characteristics of the cable

No.	Characteristics		Parameter value
1	Tensile Strength	Short Term	600N
		Long Term	300N
2	Crush Resistance Strength (N/100mm)	Short Term	1000N
		Long Term	300N
3	Min. Bending Radius (mm)	Dynamic	20D
		Static	10D
4	Temperature Range		-40~+60°C

2. Cable Marking

Unless otherwise required the sheath will be marked at intervals of 1m, containing:

- (a) Indication in meters
- (b) Quantity and type of fibers
- (c) Factory name
- (d) Date of manufacturing (year)
- (e) Other requirements

The marks will be permanent and legible for the duration of the cable life.

3. Packaging & Delivery

All cables will be delivered on drums with protection of both ends of the cable. Each drum will have a waterproof mark according to requirements.

Normal cable length: 2~5 km, or as per the customer's requirements

Production duration: 20 working days